

▼ HA5 Pneumatic Hydraulic Pumps



HA5007MV43 Pneumatic hydraulic pump

Motor power: 1.5KW

Maximum output pressure: 70MPa

Low pressure flow: 7L/Min

High pressure flow: 1L/Min



Maximum air consumption: 220M³/H

Available oil capacity: 7L

Oil weight: 36KG


- ◆ Configuration of air source processing trios
- ◆ Motor start ball valve switch, easy to start and stop operation
- ◆ Optional single action, double action manual reversing valve
- ◆ Built-in safety valve, external adjustable relief valve
- ◆ Configuration pressure gauge
- ◆ steel fuel tank, full protection frame

▼ HA5 Product Illustration:

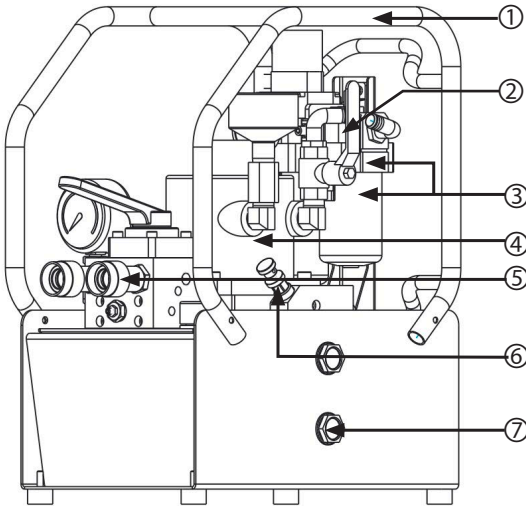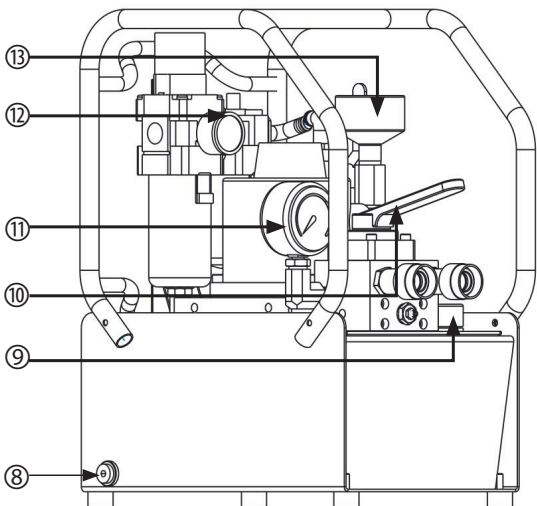


NO	Name
1	Protected Framework
2	Ball valve switch
3	triplet
4	Motor power
5	Quick Interface
6	Pressure Regulating Valve
7	Oil Level Gauge
8	Oil Outlet
9	Refueling And Exhaust Outlet
10	Manual Directional Valve
11	Manometer
12	Barometer
13	Suppressor

▼ HA5 Outline Dimensional Drawing:

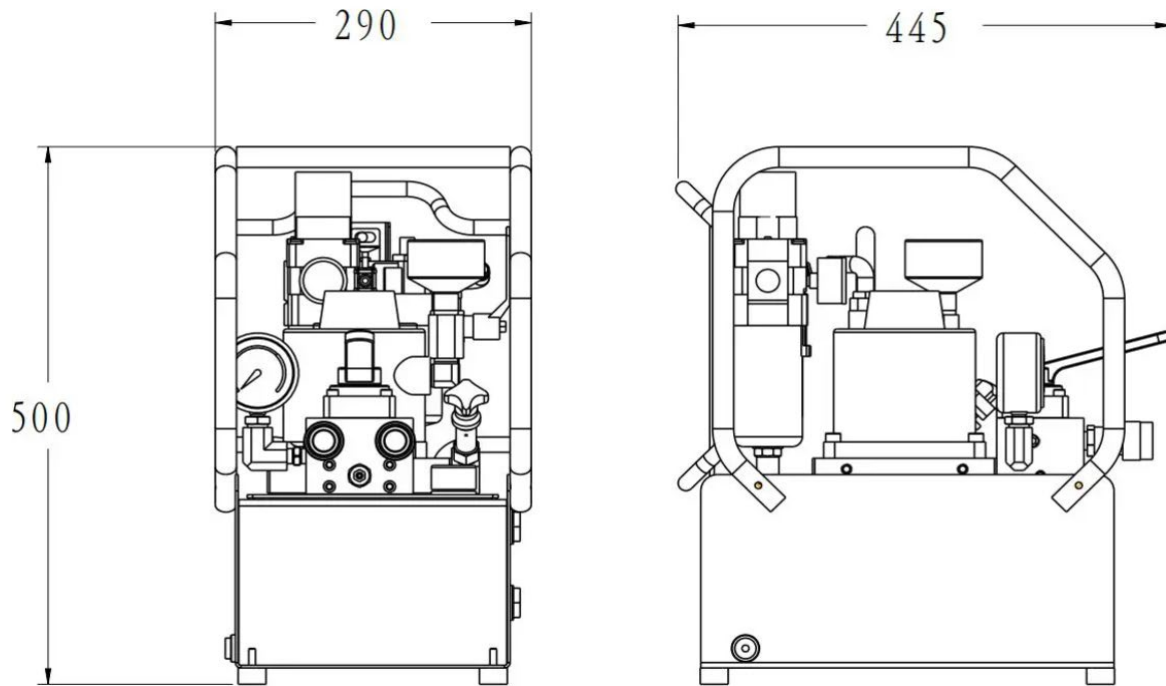

▼ HA5 Hydraulic Schematic Diagram:

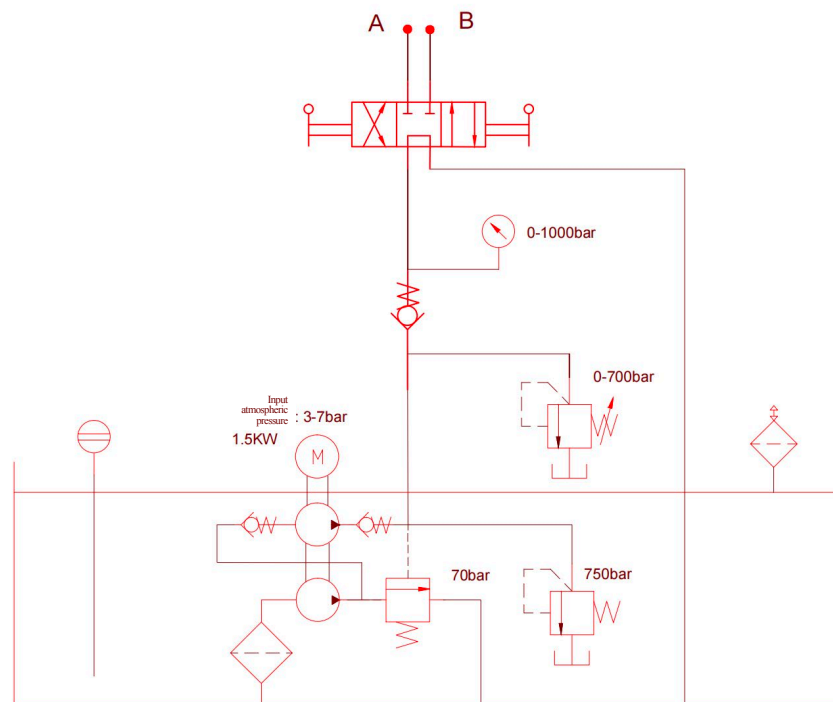

Hydraulic Oil Cylinder Pumps (70MPa)

▼ HA5 Pressure Flow Diagram:

